


**Litecast Limited**  
 Unit 6, Pool Road Business  
 Centre  
 Pool Road  
 Nuneaton  
 Warwickshire  
 CV10 9AQ

Tel: 024 7635 6161  
 Fax: 024 7635 6363  
 Email: sales@litecast.co.uk  
 Web: www.litecast.co.uk



## Closure Block

Our 'Closure Blocks' are to be used in conjunction with our Litecast XT & GT flooring systems, supplying a solid support thus allowing the continuation of the inner skin build. Our 'Closure Blocks' have a crushing strength of 7.0N/mm<sup>2</sup>. We can supply a 'Full Closure Block' to accommodate the spacing of a 'Full Polystyrene Panel', alternately we can supply a 'Small Closure Block' to suit the spacing of a 'Half Polystyrene Panel'. 'Closure Blocks' are to be installed between beam ends around the periphery of the floor, onto a mortar bed. When designed in conjunction with our Litecast XT & GT flooring system, we will provide a full design and guarantee alongside stipulating and supplying the correct quantity of pieces required. Alternately, we can supply the 'Full Closure Blocks' in packs of 60 and the 'Small Closure Blocks' in packs of 192. Should you require 'Closure Blocks' to suit a 140mm inner skin, please advise, as they are available from Litecast. Our reference code for this product is detailed below;

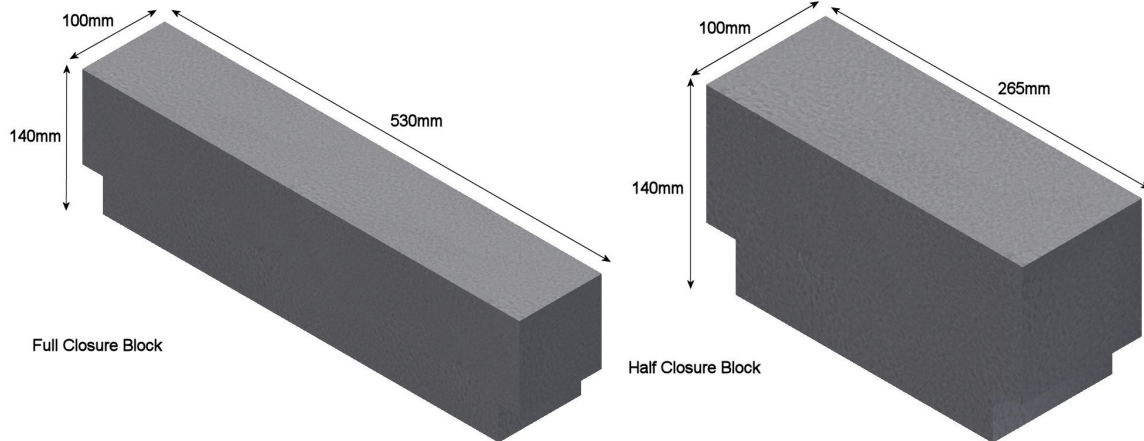

Name	Closure Block
Stock Code	ANC-LCB (Full) & ANC-SCB (Half)
Material	Concrete
Pack Size	60 (Full) & 192 (Half)
Weight (each)	12.5kg (Full) & 6.5kg (Half)
Strength	7.0N/mm <sup>2</sup>