


Litecast Limited
 Unit 6, Pool Road Business
 Centre
 Pool Road
 Nuneaton
 Warwickshire
 CV10 9AQ

Tel: 024 7635 6161
 Fax: 024 7635 6363
 Email: sales@litecast.co.uk
 Web: www.litecast.co.uk



Slip Bricks

Our 'Slip Bricks' are designed to provide a suitable support for the concrete infill block to the edges of the floor block (usually around the periphery of the floor). The 20N/mm² 'Slip Brick' will provide support to the final block, thus allowing the continuation of the inner skin build. Two 'Slip Bricks' are required between each beam when units are placed with the block at its 440mm section, whilst one 'Slip Brick' is required when the units are placed with the block at its 215mm section. 'Slip Bricks' must be bedded in between beam ends in order to ensure stable support. When designed in conjunction with our floor beams, we will offer a full design and guarantee service on the product as well as stipulating and supplying the quantity required. Alternately we can supply the 'Slip Bricks' to suit our 150mm beam in packs of 136, 204 or 408; whilst the 'Slip Bricks' to suit our 225mm beam can be supplied in packs of 360. Should you require 'Slip Bricks' to suit a 140mm inner skin, please advise, as they are available from Litecast. Our reference code for this product is detailed below;

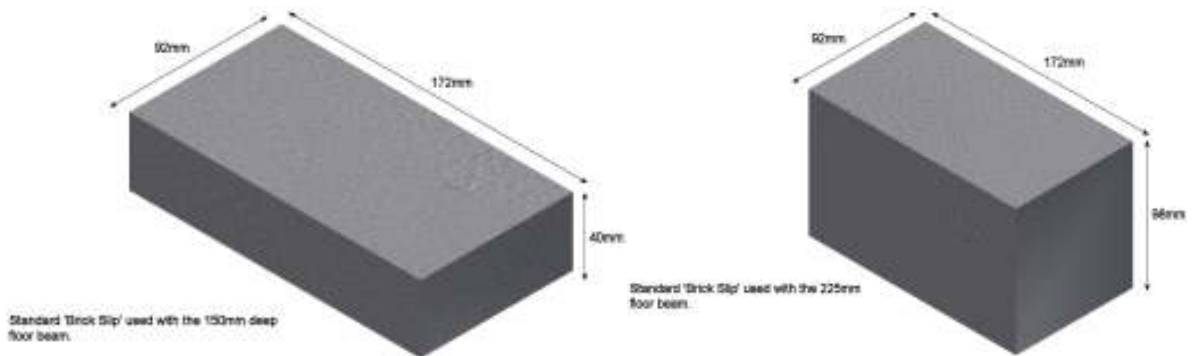

Name	Slip Bricks
Stock Code	ANC-SB
Material	Concrete
Pack Size	136, 204, 408 (for 150mm beam) & 360 (for 225mm beam)
Weight	1900-2100kg/m ³
Strength	20.0N/mm ²